

- Inline vacuum venturi with threaded vacuum port
- Lightweight and compact
- Inch supply port sizes 5/32", 1/4", 5/16", 3/8" & 1/2"
- Metric supply port sizes 4, 6, 8, 10 & 12mm
- Internal silencer




VMK	10	06	01			
Series	Venturi Nozzle Ø		Supply Port (P)		Vacuum Port	
05	0.5mm	4	4mm (5/32")	M5	M5 (10-32UNF)	
10	1.0mm	6	6mm	01	R1/8	
15	1.5mm	8	8mm (5/16")	02	R1/4	
20	2.0mm	10	10mm	03	R3/8	
		12	12mm	04	R1/2	

Vacuum Port Tube Ø	Thread Size Vacuum Port				
	M5	R1/8	R1/4	R3/8	R1/2
4mm (5/32")	●				
6mm		●			
8mm (5/16")		●			
10mm			●		
12mm				●	●

## SPECIFICATIONS

Model	Venturi Ø	Tube Ø	Thread (V)	Vacuum Flow l/min / CFM	Weight (g)
VMK054M5	0.5mm	4mm (5/32")	M5	11.5 / 0.4	20
VMK05601		6mm	R1/8		25
VMK10601	1.0mm	8mm (5/16")		R1/4	45 / 1.6
VMK10801					
VMK15802	1.5mm	10mm	R3/8	68 / 2.4	45
VMK15103					
VMK20103	2.0mm	12mm	R1/2	90 / 3.2	53
VMK20124					

## DIMENSIONS (mm)

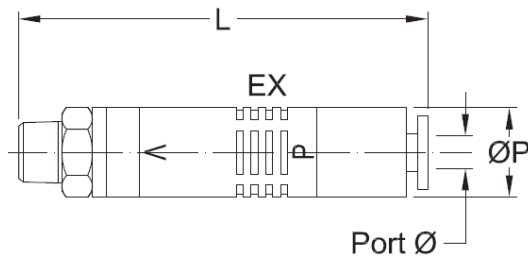

Model	Tube Ø	Thread Port	L	ØP
VMK054M5	4mm (5/32")	M5	56	14
VMK05601	6mm	R1/8	62	
VMK10601			73	16
VMK10801	75			
VMK15802	8mm (5/16")	R1/4	74	19
VMK151003	10mm	R3/8		
VMK201003			89	22
VMK201204	12mm	R1/2		